

A11 (SAE2) Bent Axis Piston Pump

High Pressure Hydraulic Bent Axis Piston Pumps, High Pressure, 450/500 BAR Working Pressure. High Rotational Speed, High Efficiency, Slim Design, Cast Iron Pump Body, Re-Designed in 2025.

Designation;


12cc, 18cc, 25cc, 32cc, 41cc,
50cc, 56cc, 63cc,



www.hydapac.com

mail@hydapac.com

A11 (SAE2) Series
Bent Axis Pumps

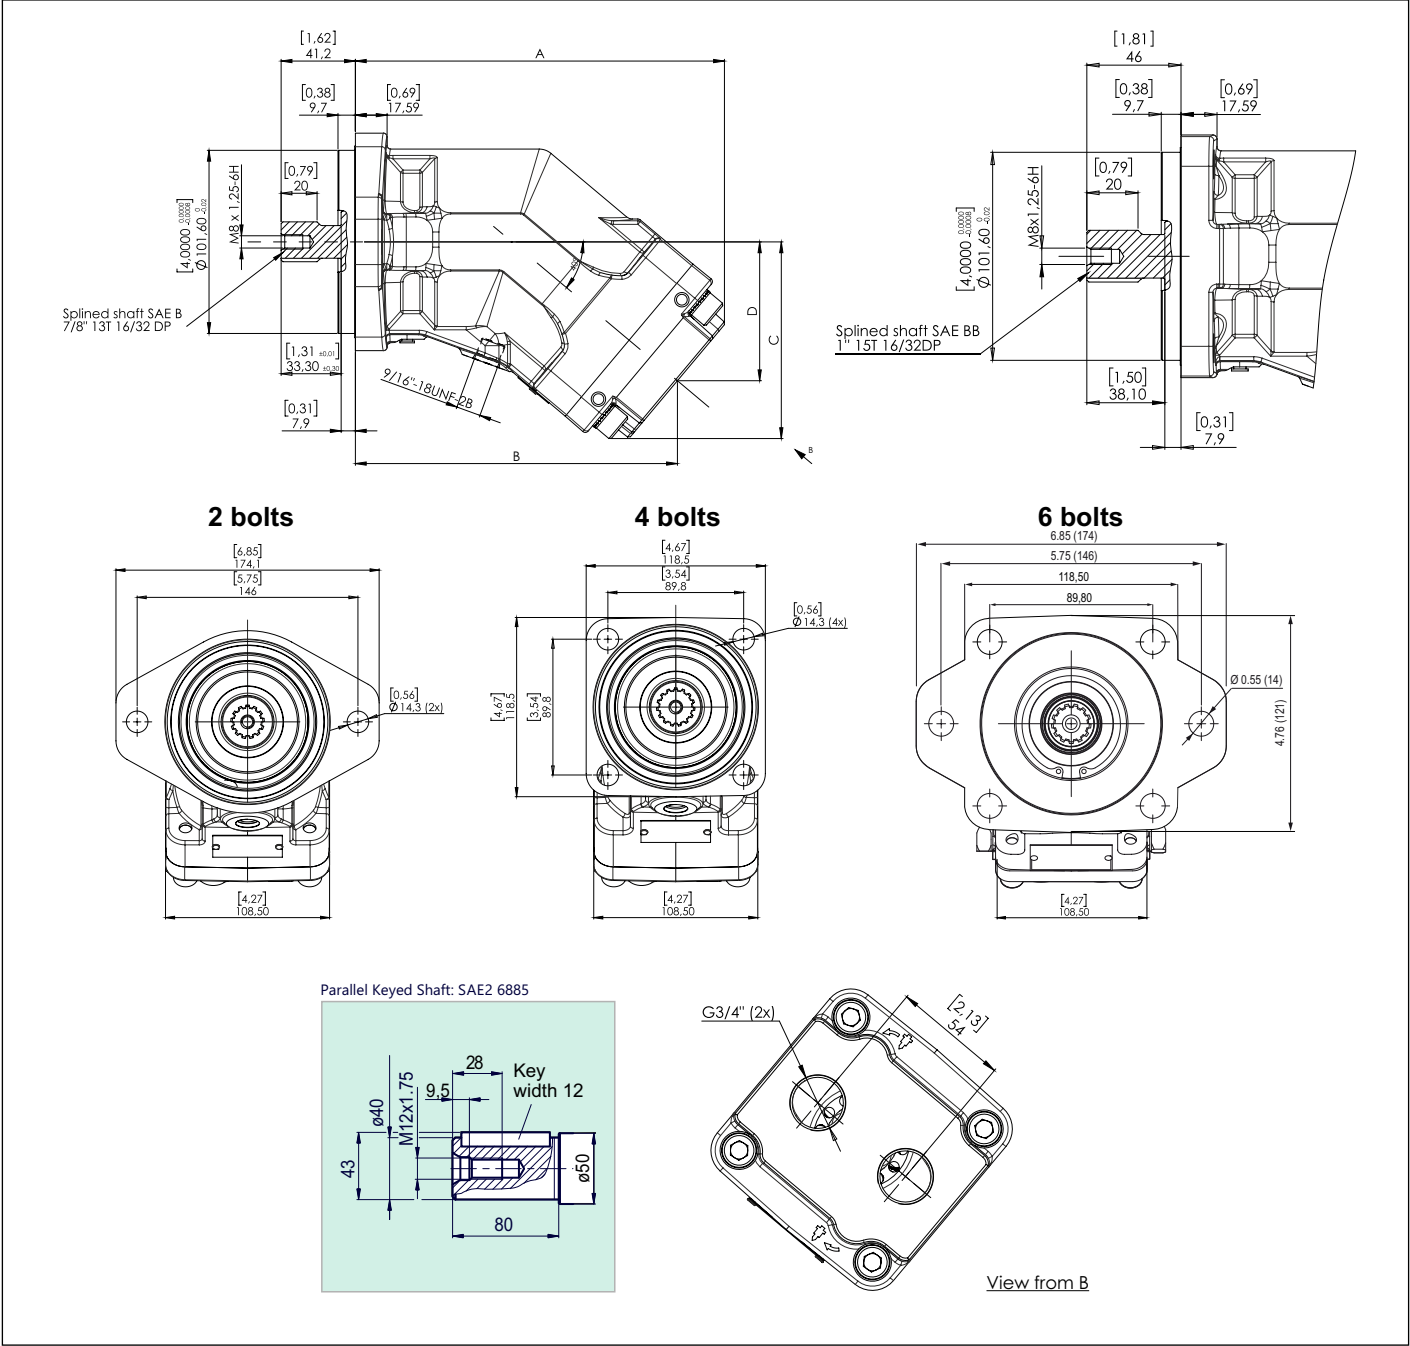


Pump MODEL	DISPL. (cc)	A	B	C	D	SHAFT (SPLINED)	SHAFT (KEYED)
12 cc (SAE J744)	12.1	197.2	172.5	103.7	73.0	SAE B 7/8"13T-16/32DP	Parallel Keyed Shaft: SAE2 6885
18 cc (SAE J744)	18.0	197.2	172.5	103.7	73.0	SAE B 7/8"13T-16/32DP	Parallel Keyed Shaft: SAE2 6885
25 cc (SAE J744)	25.1	197.2	172.5	103.7	73.0	SAE B 7/8"13T-16/32DP	Parallel Keyed Shaft: SAE2 6885
32 cc (SAE J744)	32.0	203.2	178.5	108.7	77.0	SAE B 7/8"13T-16/32DP	Parallel Keyed Shaft: SAE2 6885
41 cc (SAE J744)	41.2	203.2	178.5	108.7	77.0	SAE B 7/8"13T-16/32DP	Parallel Keyed Shaft: SAE2 6885
50 cc (SAE J744)	50.2	214.7	190.0	118.2	86.5	SAE BB 1" 15T-16/32DP	Parallel Keyed Shaft: SAE2 6885
56 cc (SAE J744)	56.0	214.7	190.0	118.2	86.5	SAE BB 1" 15T-16/32DP	Parallel Keyed Shaft: SAE2 6885
63 cc (SAE J744)	63,3	214.7	190.0	118.2	86.5	SAE BB 1" 15T-16/32DP	Parallel Keyed Shaft: SAE2 6885

Characteristics of the A11 - SAE2 Flange Bent Axis Pumps

Pump MODEL	DISPL. (cc)	CONTINUOUS MAX. SPEED (rpm)	INTERMITTENT MAX. SPEED (rpm)	MAX. FLOW ABSORBED (l/mn)	TORQUE BAR (m.N/bar)	TORQUE AT 350 BAR (m.N)	Pump MAX./MIN. TEMP. (celsius)	MAX. ALLOW PRESSURE CONTN./PEAK (bar)
12 cc	12.1	8000	8800	96	0.19	66	-25 / 110	400 / 450
18 cc	18.0	8000	8800	144	0.28	98	-25 / 110	400 / 450
25 cc	25.1	6300	6900	158	0.40	140	-25 / 110	400 / 450
32 cc	32.0	6300	6900	202	0.50	175	-25 / 110	400 / 450
41 cc	41.2	5600	6200	230	0.65	227	-25 / 110	400 / 450
50 cc	50,2	5000	5500	252	0.80	280	-25 / 110	400 / 450
56 cc	56,0	5000	5500	280	0.90	320	-25 / 110	400 / 450
63 cc	63.3	5000	5500	315	1.00	350	-25 / 110	400 / 450

Direction of Rotation; **Bi-Direcional**


The Pumps rotate clockwise or counter-clockwise depenSAE2g on the direction of hydraulic flow entering the Pump.

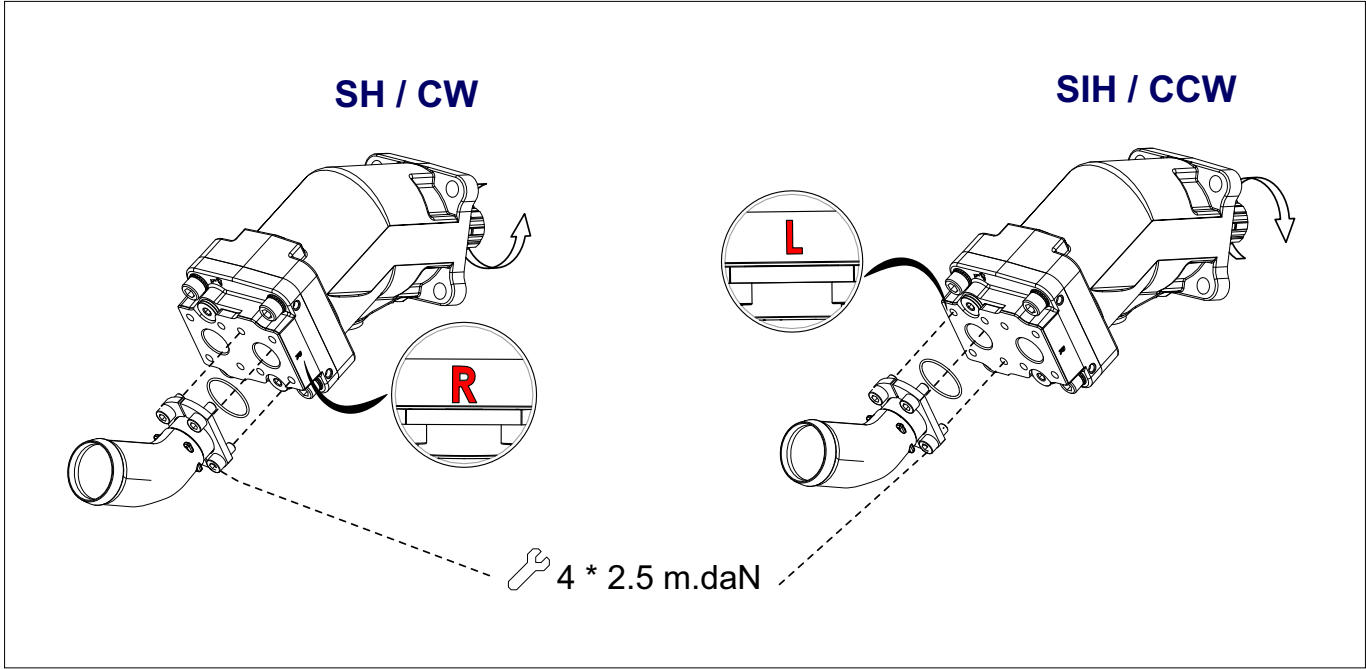



Ordering Code; A11 - SAE2 Flange Bent Axis Pumps

Model Code	Displacement	Shaft Type	Flange Type	Rotation	Sealing
A11	25	S13	B6	W	V
A11	12	S13	B2	W	V
Bent Axis Hydraulic Pump SAE2 Flange	18	Splined Shaft SAE B 7/8" 13T-16/32DP	2 Bolt SAE2 Flange Shaft	Direction of Rotation Bi-Directional	Viton High Pressure Seal
	25				
	32				
	41				
	50				
	56				
	63				
		S15	B4		N
		Splined Shaft SAE BB 1" 15T-16/32DP	4 Bolt SAE2 Flange Shaft		Nitrile Seal 5/10 Bar
		K40	B6		
		Keyed Shaft SAE2 6885	6 Bolt SAE2 Flange Shaft		

SH / CW




SIH / CCW

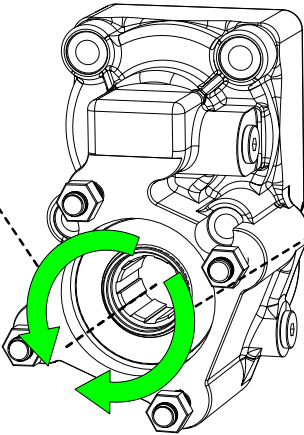


Performance, Torque, Speed and Pressure Charts

Compare Table of Torque

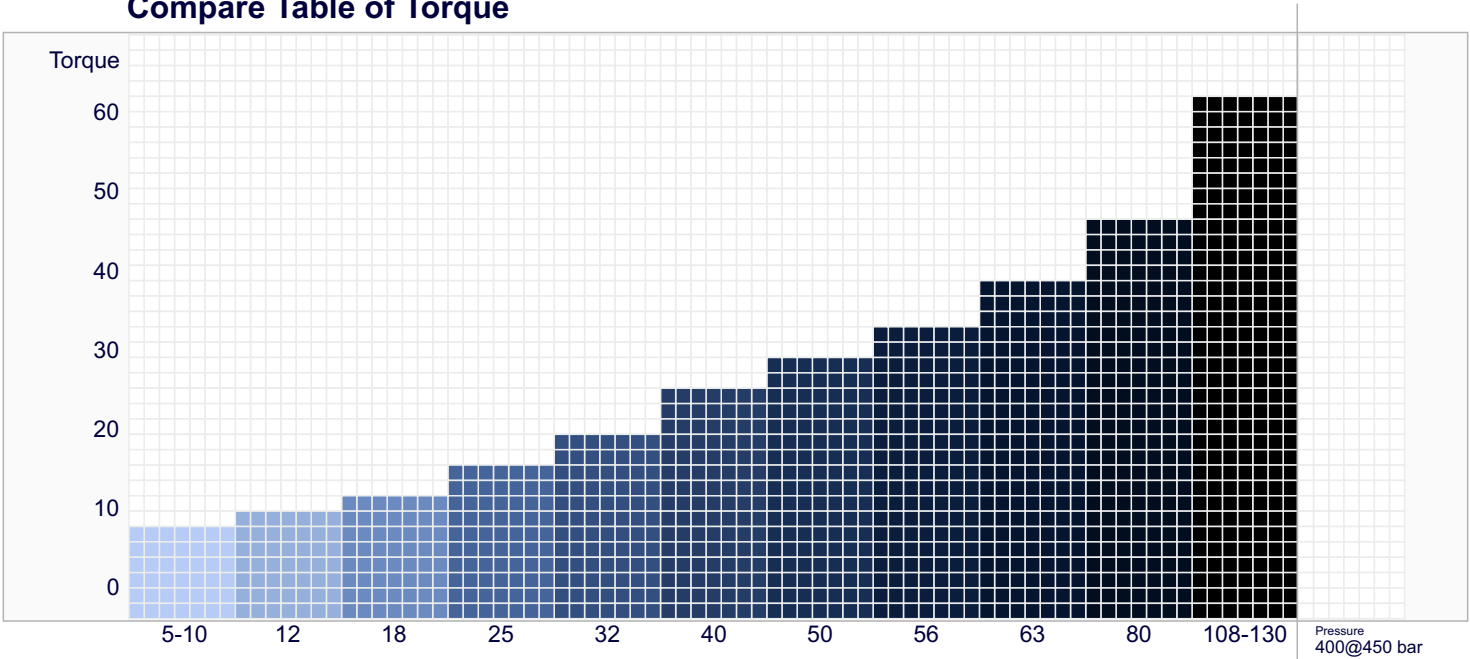


Efficiency of Bent Axis Pumps (1000 rpm)

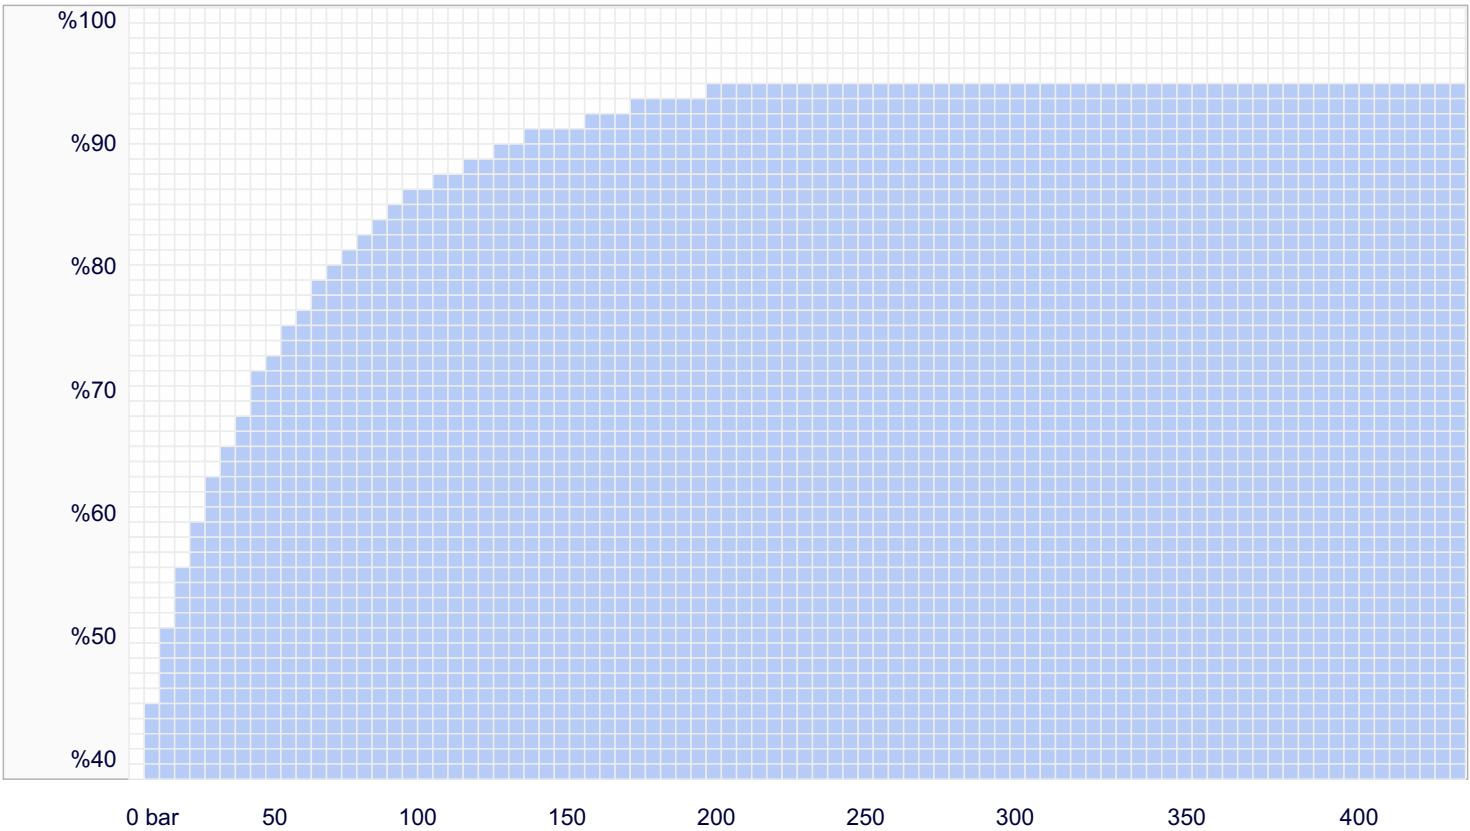


Suction Fittings for A8PS (SAE) Bent Axis Pumps

45° elbow fittings kit







Reference	Ø hose	Ø A	E	F
450039	1 1/2"	39.1	91.7	46.7
450043	42	43	91.7	46.7
450046	1 3/4"	46	91.7	46.7
450051	2"	51.8	108.4	54.4
450064	2 1/2"	64.5	125.2	62.2

90° elbow fittings kit

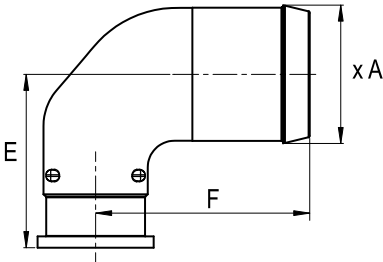

Reference	Ø hose	Ø A	E	F
900039	1 1/2"	39.1	58.6	79.5
900051	2"	51.8	64.9	80.2
900064	2 1/2"	64.5	71.3	87.5

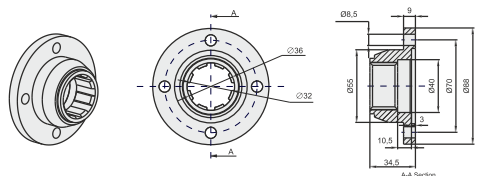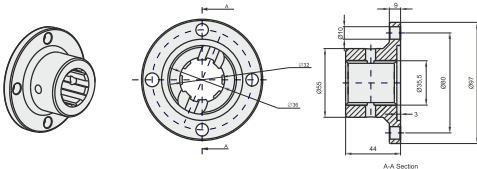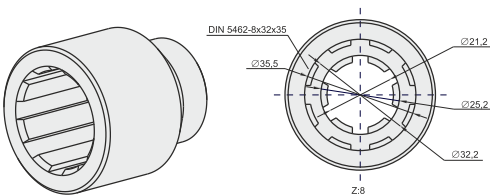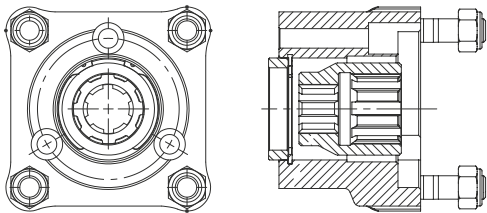

Inlet Fittings & Installation Parts

- Split Flange
- Seal
- Screw



By-Pass Valves

- 12 V
- 24 V



Hydraulic Adapters

- PTO Piston Pump Adapter
- PTO Gear Pump Adapter
- Long / Short Adapter



Flanges


- 1120 (6 Spline)
- 1120 (8 Spline)
- 1300 (6 Spline)
- 1300 (8 Spline)



Couplers


- 6 x 8 Couplar
- 6 x 8 Couplar (Long)
- 8 x 8 Couplar
- 8 x 8 Couplar (Long)

ByPass Valve for A11 (SAE2) Bent Axis Pumps

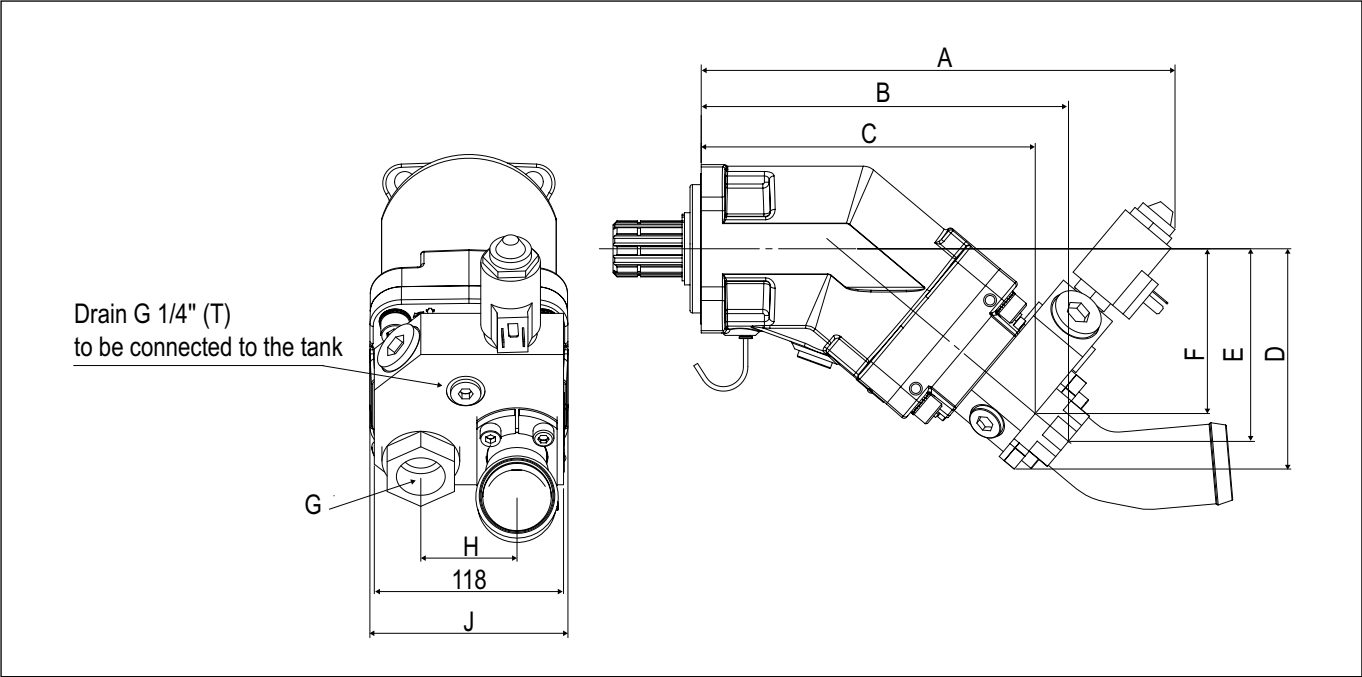

Pump MODEL	DISPL. (cc)	A	B	C	D	E	F	G	H	J
5 cc	5.1	289.35	223.04	202.19	132.20	114.72	97.58	G 3/4"	54	108
10 cc	10.2	289.35	223.04	202.19	132.20	114.72	97.58	G 3/4"	54	108
12 cc	12.0	289.35	223.04	202.19	132.20	114.72	97.58	G 3/4"	54	108
18 cc	18.0	289.35	223.04	202.19	132.20	114.72	97.58	G 3/4"	54	108
25 cc	25.0	289.35	223.04	202.19	132.20	114.72	97.58	G 3/4"	54	108
32 cc	32.0	295.50	229.00	208.30	137.30	120.10	102.70	G 3/4"	54	108
41 cc	41.0	295.50	229.00	208.30	137.30	120.10	102.70	G 3/4"	54	108
50 cc	50,3	307.10	240.40	220.00	147.10	129.70	112.50	G 3/4"	54	108
56 cc	56,0	307.10	240.40	220.00	147.10	129.70	112.50	G 3/4"	54	108
63 cc	63.0	307.10	240.40	220.00	147.10	129.70	112.50	G 3/4"	54	108
80 cc	80,4	334.00	269.00	246.70	157.80	143.90	124.80	G 1"	60	123
108 cc	108	334.00	269.00	246.70	157.80	143.90	124.80	G 1"	60	123
130 cc	130	336.30	271.3	249.00	159.70	145.80	126.70	G 1"	60	123

ByPass Valve for A11 (SAE2) Bent Axis Pumps

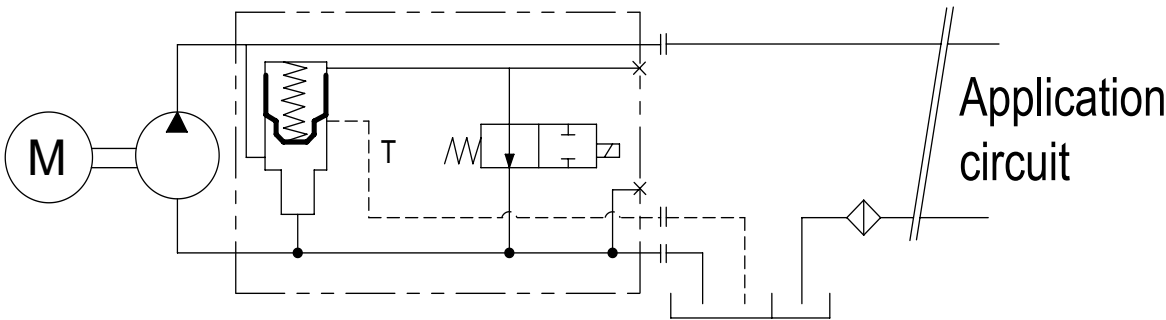

Pump MODEL	DISPL. (cc)	WEIGHT WITHOUT INLET FITTING (kg)	WEIGHT WITH 2" INLET FITTING (kg)	TORQUE WITHOUT FITTING (N.m)	TORQUE WITH FITTING (N.m)
5 cc	5.1	9.00	9.40	8.20	8.60
10 cc	10.2	9.00	9.40	8.65	9.05
12 cc	12.0	9.20	9.60	8.74	9.14
18 cc	18.0	9.30	9.70	8.79	9.19
25 cc	25.0	11.00	11.40	8.89	9.29
32 cc	32.0	11.10	11.50	11.10	11.50
41 cc	41.0	11.20	11.60	11.15	11.55
50 cc	50,3	11.30	11.70	11.75	12.15
56 cc	56,0	11.35	11.75	11.80	12.20
63 cc	63.0	11.45	11.85	11.85	12.25
80 cc	80,4	14.80	15.20	17.80	18.30
108 cc	108	14.90	15.30	17.92	18.42
130 cc	130	15.30	15.70	18.70	19.50

A11 (SAE2) Series Bent Axis Pumps

40° bent axis design giving high power, small overall dimensions, optimum efficiency and economic design. Flange and shaft designed for direct mounting on truck gearbox PTO's. The fixed displacement bent axis pumps generates a hydraulic fluid flow. It is designed for use in trucks, commercial vehicles and all stationary hydraulic applications. The Pump a fixed pump with rotary group in bent-axis design open circuits. Flow is proportional to drive speed and displacement.

For axial piston units with bent-axis design, the Pistons are arranged diagonally with respect to the drive shaft. The pump covers the whole displacement range 5 to 130 cm³/rev. The pump has been developed with modern styling and design to satisfy market demand as to designed new generation plate and pistons with give high flow performance, high pressures with high efficiency and very small dimensions.

The pump is available both to SAE2 and SAE world standards and can be mounted either directly at the gear box or via a drive shaft. If necessary it can also be augmented with a by-pass valve. Other brand bent axis pumps compatible and interchangeable with SAE2 bent axis pumps. Refer to the data sheet and order confirmation for the technical data, operating conditions and operating limits of the bent axis piston pumps.

Formulas			
Pump Output Flow	GPM	$GPM = (\text{Speed (rpm)} \times \text{disp. (cu. in.)}) / 231$	$GPM = (n \times d) / 231$
Pump Input Horsepower	HP	$HP = GPM \times \text{Pressure (psi)} / 1714 \times \text{Efficiency}$	$HP = (Q \times P) / 1714 \times E$
Pump Efficiency	E	Overall Efficiency = Output HP / Input HP	E _{Overall} = HP _{Out} / HP _{In} X 100
		Overall Efficiency = Volumetric Eff. × Mechanical Eff.	E _{Overall} = Eff _{Vol.} × Eff _{Mech.}
Pump Volumetric Efficiency	E	Volumetric Efficiency = Actual Flow Rate Output (GPM) / Theoretical Flow Rate Output (GPM) × 100	Eff _{Vol.} = Q _{Act.} / Q _{Theo.} X 100
Pump Mechanical Efficiency	E	Mechanical Efficiency = Theoretical Torque to Drive / Actual Torque to Drive × 100	Eff _{Mech} = T _{Theo.} / T _{Act.} × 100
Pump Displacement	CIPR	Displcmnt (In. ³ / rev.) = Flow Rate (GPM) × 231 / Pump RPM	CIPR = GPM × 231 / RPM
Pump Torque	T	Torque = Horsepower × 63025 / RPM	T = 63025 × HP / RPM
		Torque = Pressure (PSIG) × Pump Displacement (CIPR) / 2π	T = P × CIPR / 6.28

- Horsepower for driving a pump** : For every 1 hp of drive, the equivalent of 1 gpm @ 1500 psi can be produced.
- Horsepower for idling a pump** : To idle a pump when it is unloaded will require about 5% of it's full rated power
- Wattage for heating hydraulic oil** : Each watt will raise the temperature of 1 gallon of oil by 1° F. per hour.
- Flow velocity in hydraulic lines** : Pump suction lines 2 to 4 feet per second, pressure lines up to 500 psi - 10 to 15 ft./sec., pressure lines 500 to 3000 psi - 15 to 20 ft./sec.; all oil lines in air-over-oil systems; 4 ft./sec.

Complete Product Range

Bent Axis Piston Motors

A9MD (DIN) Bent Axis Motors
A9MO (ISO) Bent Axis Motors
A9MS (SAE) Bent Axis Motors
A9ML (SAE2) Bent Axis Motors
A9MF (Fixed Plugin) Bent Axis Motors
A10M (HYBRID) Bent Axis Motors
A7GM Hydraulic Gear Motors
A7GMT Tandem Hydraulic Gear Motors

Bent Axis Piston Pumps

A8PA (Aluminum) Bent Axis Pumps
A8PD (DIN) Bent Axis Pumps
A8PO (ISO) Bent Axis Pumps
A8PS (SAE) Bent Axis Pumps
A8PF (Fixed Plugin) Bent Axis Pumps
A10 (HYBRID) Bent Axis Pumps
A11 (ISO2) Bent Axis Pumps
A11 (SAE2) Bent Axis Pumps

Variable Displacement Pumps

A12V Variable Displacement Piston Pumps

Dual Flow Piston Pumps

A8PL (DIN) Dual Flow Pumps

Axial Piston & Gear Pumps

A4PP Axial Hydraulic Piston Pumps
A6HP High Pressure Piston Pumps
A7GP Hydraulic Gear Pumps
A7GPT Tandem Hydraulic Gear Pumps

Valve (ByPass) (Flushing) (Cavitation)

Circulation Valve
ByPass Valve
Anti-Cavitation Valve
Flushing Valve
LS Valve
AntiShock Valve
Speed Sensor

Hydraulic Spare Parts

Suction Fittings
Couplars
Adapters
Flanges
Power Take Off
Monoblock Valve
Section Valve

Hydraulic Pumps, Motors

Bent Axis Hydraulic Piston Motors, Bent Axis Hydraulic Piston Pumps, Piston Pumps, Variable Displacement Piston Pumps, Variable Displacement Piston Motors, Axial Piston Pumps, High Pressure Piston Pumps, Gear Pumps, Gear Motors, Hydraulic Valve.

www.hydapac.com

Address;

HYDAPAC HYDRAULIC PUMPS & MOTORS

Address; (Fabrika, İmalat)

Fevzicakmak Mah. Sıla Cad. Kobisan 3 San. Sit.

No: 73 / C Karatay – Konya, PO Code; 42050, Türkiye

Address; (Montaj, Sevkiyat)

Fevzicakmak Mah. Sıla Cad. Kobisan 3 San. Sit.

No: 71 / AD Karatay – Konya, PO Code; 42050, Türkiye

Phone; +90 551 148 26 88

mail@hydapac.com