

A7GMT Tandem Hydraulic Gear Motor

Tandem Hydraulic Gear Motors, Single Flow, High Pressure.
High Rotational Speed, High Efficiency, Slim Design.
Cast Iron Motor Body, Re-Designed in 2025.

Designation;


17cc, 22cc, 25cc, 40cc, 45cc, 50cc,
63cc, 75cc, 80cc, 100cc, 110cc, 120cc, 130cc



www.hydapac.com

mail@hydapac.com


A7GMT Tandem Hydraulic Gear Motors

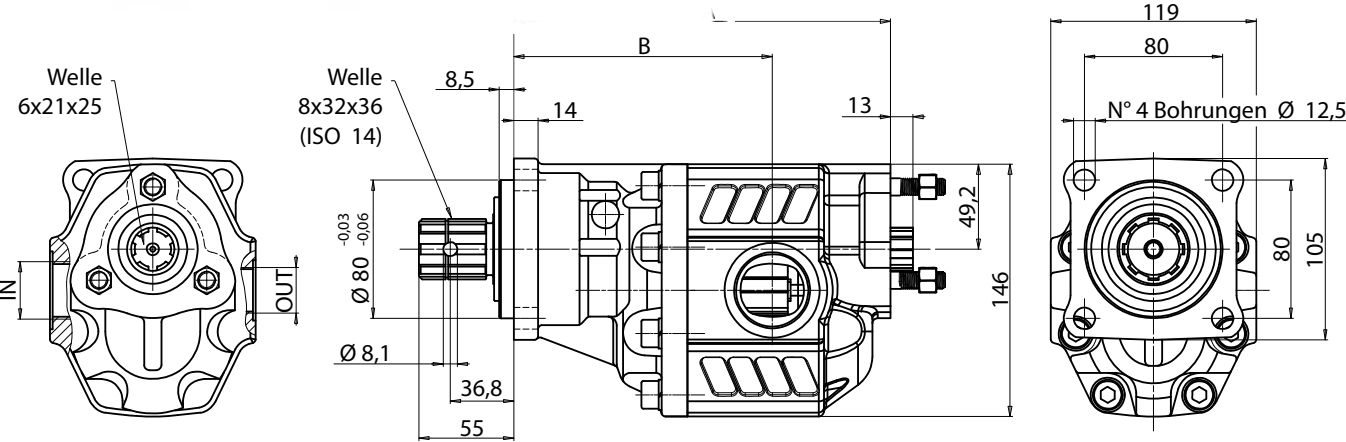

Displacement	Ordering Code		Technical Information						Dimensions					
	Bi-Directional Motor Version	Bi-Directional Motor Version	P1 in bar	P2 in bar	P3 in bar	Maximum Speed	Maximum Intermitt. Peak Speed	min. Pressure	Suction Outlet 1	Suction Outlet 2	Pressure Conn. 1	Pressure Conn. 2	A in mm	B in mm
17,04	A7GMT	035-959-01050	290	315	325	2500	3000		300	1/2"	1/2"	180	119	10,6
22,15	A7GMT	035-959-01150	290	315	325	2500	3000		300	1/2"	1/2"	183,5	121,5	11
26,18	A7GMT	035-959-01250	290	315	325	2500	3000		300	1/2"	1/2"	186	124	11,5
33,88	A7GMT	035-959-01350	280	300	310	2200	2800		300	3/4"	3/4"	191	124	12,5
43,12	A7GMT	035-959-01450	270	290	300	2000	2500		300	3/4"	3/4"	197	130	13
50,82	A7GMT	035-959-01550	240	260	280	2000	2500		300	3/4"	3/4"	202	130,5	13,5
60,06	A7GMT	035-959-01650	220	240	250	1800	2000		300	1"	1"	208	136,5	14
72,88	A7GMT	035-959-01750	200	220	230	1600	1800		300	1"	1"	216	135,5	14,5
81,08	A7GMT	035-959-01850	190	210	220	1500	1800		300	1-1/4"	1-1/4"	221	142,5	14,9

P1 = max. Pressure (100%)
P2 = max. Intermittent pressure (max. 20 Sec.)
P3 = Peak Pressure (max. 6 Sec.)


A7GMT Tandem Hydraulic
Gear Motors

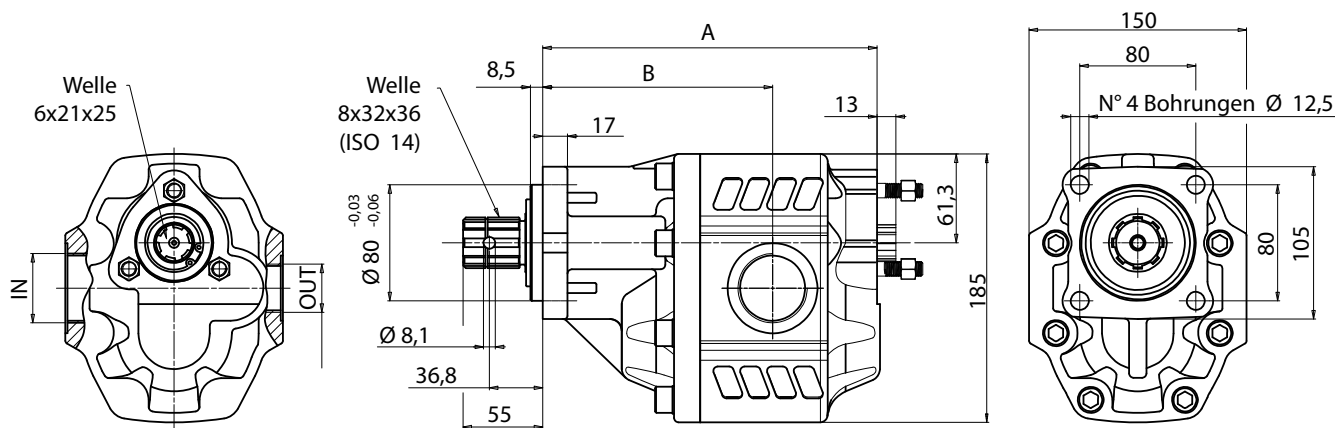

Displacement	Ordering Code		Technical Information						Dimensions					
	Bi-Directional Motor Version	Bi-Directional Motor Version	P1 in bar	P2 in bar	P3 in bar	Maximum Speed	Maximum Intermitt. Peak Speed	min. Pressure	Suction Outlet 1	Suction Outlet 2	Pressure Conn. 1	Pressure Conn. 2	A in mm	B in mm
63,7	A7GMT	035-969-01050	290	315	325	1800	2700		300	1"	3/4"	199,5	136,5	20,1
74,87	A7GMT	035-969-01150	280	300	315	1800	2700		300	1"	3/4"	203,5	140,5	20,7
85,96	A7GMT	035-969-01250	260	280	290	1800	2700		300	1-1/4"	1"	207,5	141	20,9
102,6	A7GMT	035-969-01350	250	270	280	1800	2700		300	1-1/4"	1"	213,5	144,5	21,5
119,24	A7GMT	035-969-01450	240	260	270	1500	2700		300	1-1/4"	1"	219,5	150,5	22
135,88	A7GMT	035-969-01550	220	250	260	1500	2500		300	1-1/2"	1"	225,5	153,5	22,8
149,75	A7GMT	035-969-01650	180	210	220	1500	2500		300	1-1/2"	1"	230,5	158,8	24,1

P1 = max. Pressure (100%)
P2 = max. Intermittent pressure (max. 20 Sec.)
P3 = Peak Pressure (max. 6 Sec.)


A7GMT Tandem Hydraulic
Gear Motors

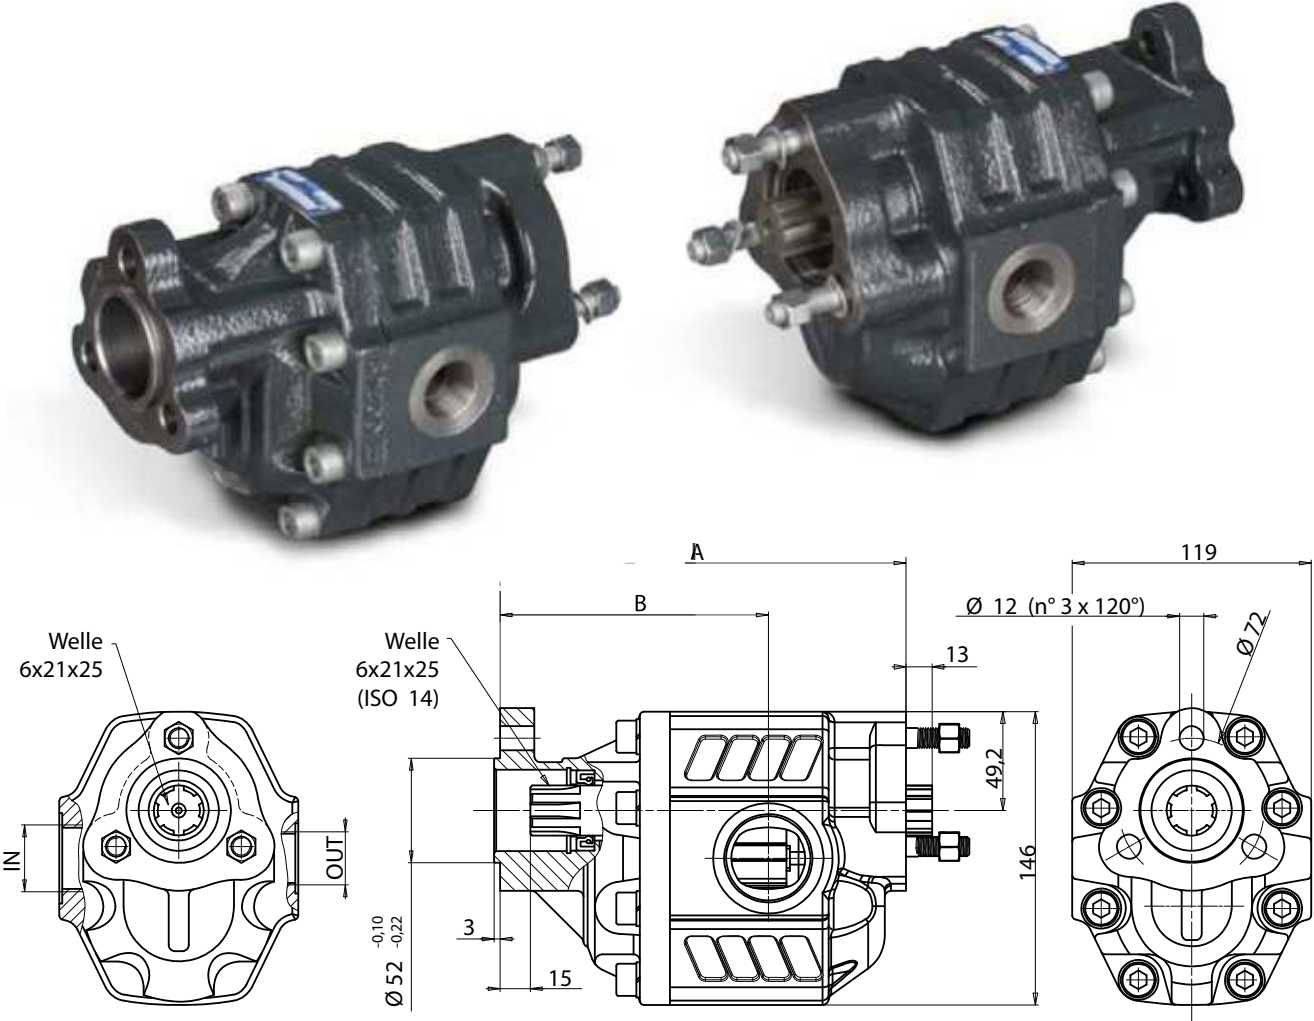

Displacement	Ordering Code		Technical Information						Dimensions					
	Bi-Directional Motor Version	Bi-Directional Motor Version	P1 in bar	P2 in bar	P3 in bar	Maximum Speed	Maximum Intermitt. Peak Speed	min. Pressure	Suction Outlet 1	Suction Outlet 2	Pressure Conn. 1	Pressure Conn. 2	A in mm	B in mm
17,04	A7GMT	035-979-01050	290	315	325	2500	3000		300	1/2"	1/2"	164	103	9,6
22,15	A7GMT	035-979-01150	290	315	325	2500	3000		300	1/2"	1/2"	167,5	105,5	9,8
26,18	A7GMT	035-979-01250	290	315	325	2500	3000		300	1/2"	1/2"	170	108	10,1
33,88	A7GMT	035-979-01350	280	300	310	2200	2800		300	3/4"	3/4"	175	108	10,5
43,12	A7GMT	035-979-01450	270	290	300	2000	2500		300	3/4"	3/4"	181	114	11,02
50,82	A7GMT	035-979-01550	240	260	280	2000	2500		300	3/4"	3/4"	186	114,5	11,3
60,06	A7GMT	035-979-01650	220	240	250	1800	2000		300	1"	1"	192	120,5	11,8
72,88	A7GMT	035-979-01750	200	220	230	1600	1800		300	1"	1"	200	119,5	12,4
81,08	A7GMT	035-979-01850	190	210	220	1500	1800		300	1-1/4"	1-1/4"	205	126,5	12,6

P1 = max. Pressure (100%)
P2 = max. Intermittent pressure (max. 20 Sec.)
P3 = Peak Pressure (max. 6 Sec.)

A7GMT Tandem Hydraulic
Gear Motors

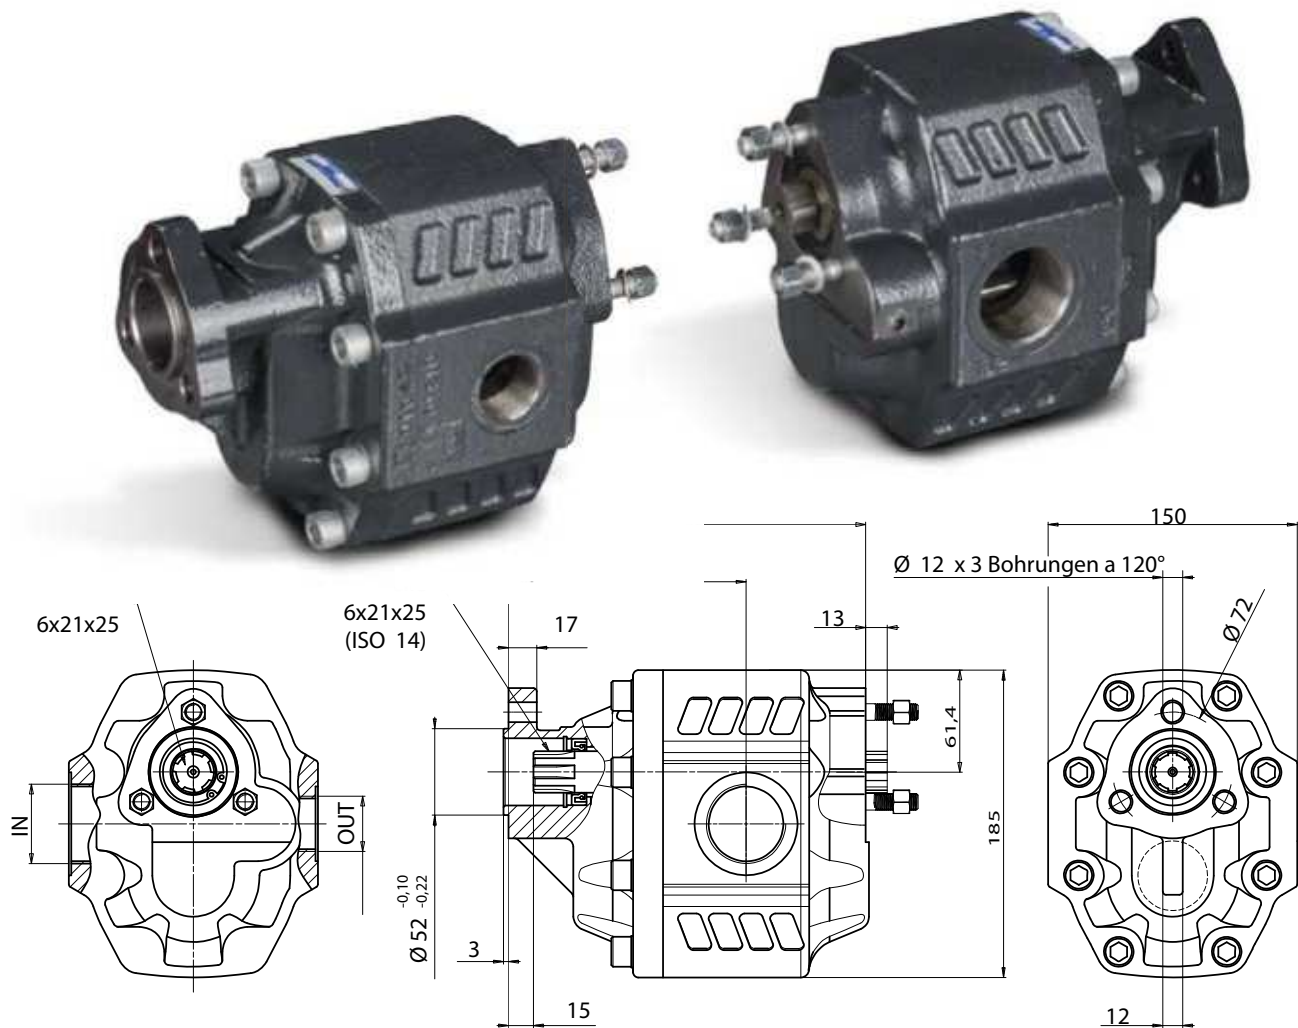


Displacement	Ordering Code		Technical Information						Dimensions					
	Bi-Directional Motor Version	Bi-Directional Motor Version	P1 in bar	P2 in bar	P3 in bar	Maximum Speed	Maximum Intermitt. Peak Speed	min. Pressure	Suction Outlet 1	Suction Outlet 2	Pressure Conn. 1	Pressure Conn. 2	A in mm	B in mm
63,7	A7GMT	035-989-01050	290	315	325	1800	2700	300	1"	3/4"	184	121	17	
74,87	A7GMT	035-989-01150	280	300	315	1800	2700	300	1"	3/4"	188	125	18	
85,96	A7GMT	035-989-01250	260	280	290	1800	2700	300	1-1/4"	1"	192	125,5	18,5	
102,6	A7GMT	035-989-01350	250	270	280	1800	2700	300	1-1/4"	1"	198	129	19	
119,24	A7GMT	035-989-01450	240	260	270	1500	2700	300	1-1/4"	1"	204	135	19,5	
135,88	A7GMT	035-989-01550	220	250	260	1500	2500	300	1-1/2"	1"	210	138	20,5	
149,75	A7GMT	035-989-01650	180	210	220	1500	2500	300	1-1/2"	1"	215	143	21	

P1 = max. Pressure (100%)
P2 = max. Intermittent pressure (max. 20 Sec.)
P3 = Peak Pressure (max. 6 Sec.)

A7GMT Tandem Hydraulic

Gear Motors

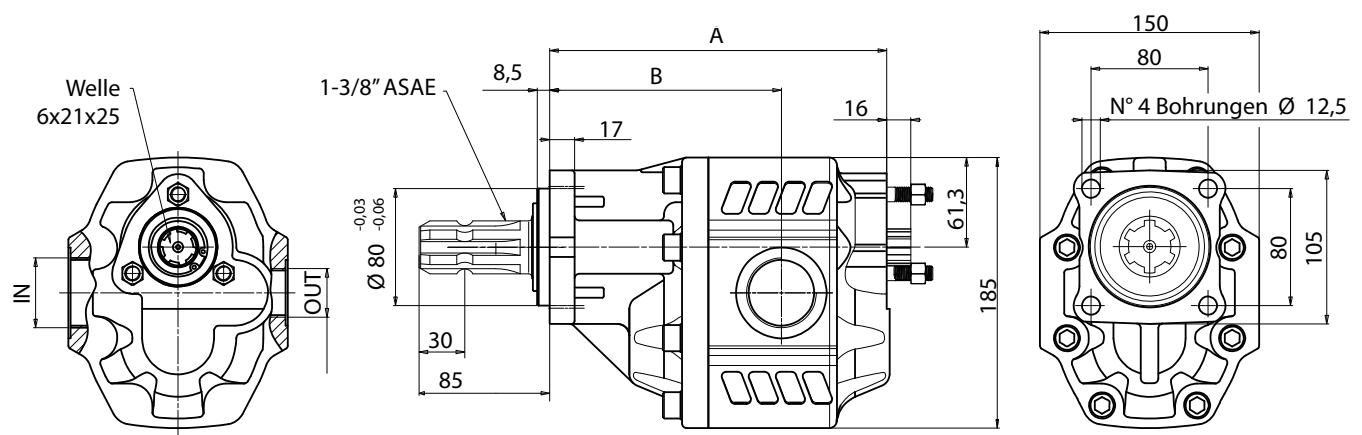

Displacement	Ordering Code		Technical Information						Dimensions					
	Bi-Directional Motor Version	Bi-Directional Motor Version	P1 in bar	P2 in bar	P3 in bar	Maximum Speed	Maximum Intermitt. Peak Speed	min. Pressure	Suction Outlet 1	Suction Outlet 2	Pressure Conn. 1	Pressure Conn. 2	A in mm	B in mm
63,7	A7GMT	035-999-01050	290	315	325	1800	2700	300	1"	3/4"	199,5	136,5		
74,87	A7GMT	035-999-01150	280	300	315	1800	2700	300	1"	3/4"	203,5	140,5		
85,96	A7GMT	035-999-01250	260	280	290	1800	2700	300	1-1/4"	1"	207,5	141		
102,6	A7GMT	035-999-01350	250	270	280	1800	2700	300	1-1/4"	1"	213,5	144,5		
119,24	A7GMT	035-999-01450	240	260	270	1500	2700	300	1-1/4"	1"	219,5	150,5		
135,88	A7GMT	035-999-01550	220	250	260	1500	2500	300	1-1/2"	1"	225,5	153,5		
149,75	A7GMT	035-999-01650	180	210	220	1500	2500	300	1-1/2"	1"	230,5	158,5		

P1 = max. Pressure (100%)

P2 = max. Intermittent pressure (max. 20 Sec.)

P3 = Peak Pressure (max. 6 Sec.)

Complete Product Range

Bent Axis Piston Motors

A9MD (DIN) Bent Axis Motors
A9MO (ISO) Bent Axis Motors
A9MS (SAE) Bent Axis Motors
A9ML (SAE2) Bent Axis Motors
A9MF (Fixed Plugin) Bent Axis Motors
A10M (HYBRID) Bent Axis Motors
A7GM Hydraulic Gear Motors
A7GMT Tandem Hydraulic Gear Motors

Bent Axis Piston Pumps

A8PA (Aluminum) Bent Axis Pumps
A8PD (DIN) Bent Axis Pumps
A8PO (ISO) Bent Axis Pumps
A8PS (SAE) Bent Axis Pumps
A8PF (Fixed Plugin) Bent Axis Pumps
A10 (HYBRID) Bent Axis Pumps
A11 (ISO2) Bent Axis Pumps
A11 (SAE2) Bent Axis Pumps

Variable Displacement Pumps

A12V Variable Displacement Piston Pumps

Dual Flow Piston Pumps

A8PL (DIN) Dual Flow Pumps

Axial Piston & Gear Pumps

A4PP Axial Hydraulic Piston Pumps
A6HP High Pressure Piston Pumps
A7GP Hydraulic Gear Pumps
A7GPT Tandem Hydraulic Gear Pumps

Valve (ByPass) (Flushing) (Cavitation)

Circulation Valve
ByPass Valve
Anti-Cavitation Valve
Flushing Valve
LS Valve
AntiShock Valve
Speed Sensor

Hydraulic Spare Parts

Suction Fittings
Couplars
Adapters
Flanges
Power Take Off
Monoblock Valve
Section Valve

Hydraulic Pumps, Motors

Bent Axis Hydraulic Piston Motors, Bent Axis Hydraulic Piston Pumps, Piston Pumps, Variable Displacement Piston Pumps, Variable Displacement Piston Motors, Axial Piston Pumps, High Pressure Piston Pumps, Gear Pumps, Gear Motors, Hydraulic Valve.

www.hydapac.com

Address;

HYDAPAC HYDRAULIC PUMPS & MOTORS

Address; (Fabrika, İmalat)

Fevzicakmak Mah. Sıla Cad. Kobisan 3 San. Sit.

No: 73 / C Karatay – Konya, PO Code; 42050, Türkiye

Address; (Montaj, Sevkiyat)

Fevzicakmak Mah. Sıla Cad. Kobisan 3 San. Sit.

No: 71 / AD Karatay – Konya, PO Code; 42050, Türkiye

Phone; +90 551 148 26 88

mail@hydapac.com